

Power Your Lights

How to power Vortex8 or LS600?
— using SWIT batteries




28.8v
500w

HB-C420S

V-mount Battery

28.8V [22-33.6V] Voltage
420Wh Huge Capacity
500W Constant High Load

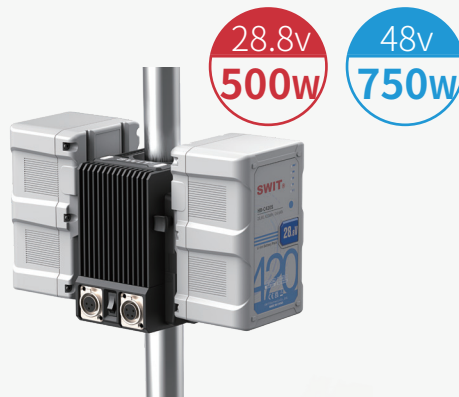

28.8v
500w

48v
750w

TD-R230S

Dual Batteries Adaptor

Install 2x 28.8V V-mount batteries
Neutrik SpeakON 22-33.6V 500W output
3-pin XLR Reg. 48V 750W output



28.8v
500w

S-7250S

Single Battery Adaptor

Battery voltage × Max 17A out
Neutrik SpeakON DC socket
28.8V 500W output by HB-C420S

Cine Lights Power Solution Guide

Brand	Model	Power	DC IN	Dual Batteries Solution	Run Time	Single Battery Solution	Run Time
ARRI	Orbiter	430W	48-50V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.1h	No	—
ARRI	Skypanel S60/120	430W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.1h	No	—
ARRI	L5-C	150W	23-36V, 4-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>5.6h	HB-C420S + S-7250S	>2.8h
Aputure	LS-600X/D/C	720W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>1.2h	No	—
Aputure	Nova P600C	720W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>1.2h	No	—
Aputure	Nova P300C	360W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.3h	No	—
Aputure	Amaran 200d/x	250W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>3.4h	No	—
Aputure	Amaran 100d/x	130W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>6.5h	No	—
Creamsource	Vortex 4	325W	48V, Ecomate	2x HB-C420S + TD-R230S (48V)	>2.6h	No	—
Creamsource	Vortex 8	650W	48V, Ecomate	2x HB-C420S + TD-R230S (48V)	>1.3h	No	—
Fiilex	Q5 Color	165W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>5.1h	No	—
Fiilex	Q8 Color	300W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.8h	No	—
Fiilex	Matrix Color	300W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.8h	No	—
Kino Flo	Freestyle T44/T24	150W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>5.6h	HB-C420S + S-7250S	>2.8h
Kino Flo	Freestyle T42/T22	135W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>6.2h	HB-C420S + S-7250S	>3.1h
Kino Flo	Freestyle T41/T21	100W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>8.4h	HB-C420S + S-7250S	>4.2h
Kino Flo	Freestyle 41/31/21	150W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>5.6h	HB-C420S + S-7250S	>2.8h
Kino Flo	Freestyle MINI	100W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>8.4h	HB-C420S + S-7250S	>4.2h
Kino Flo	DIVA-LITE 41/31/21	150W	18-36V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>5.6h	HB-C420S + S-7250S	>2.8h
LIGHTSTAR	LUXED S	180W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>4.7h	No	—
LIGHTSTAR	LUXED 4	720W	48V, SpeakON	2x HB-C420S + TD-R230S (48V)	>1.2h	No	—
Litepanel	Gemini 2x1	325W	23-34V, 3-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>2.6h	HB-C420S + S-7250S	>1.3h
NANLITE	Forza 300	300W	48V, SpeakON	2x HB-C420S + TD-R230S (48V)	>2.8h	No	—
NANLITE	Forza 500	500W	48V, SpeakON	2x HB-C420S + TD-R230S (48V)	>2.8h	No	—
NANLUX	Dyno 650C	650W	48V, SpeakON	2x HB-C420S + TD-R230S (48V)	>1.3h	No	—
Prolights	EclPanel TWCJR	220W	24-36V, 4-pin XLR	2x HB-C420S + TD-R230S (28.8V)	>3.8h	HB-C420S + S-7250S	>1.9h
Prolights	EclPanel TWCJR4x1	230W	48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>3.7h	No	—
Prolycht	Orion 675 FS	675W	46-50V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>1.2h	No	—
VELVET	KOSMOS	400W	26-48V, 3-pin XLR	2x HB-C420S + TD-R230S (48V)	>2.1h	No	—